

**特販
企画**

台数限定


納期：約1週間

UHV手動ゲートバルブ

特長

- ・高真空～超高真空に対応
- ・コストパフォーマンス○
- ・汎用性が高い

Technical Data	GVM-S04500	GVM-S06500	GVM-S08500
Connection flange	DN 40 CF-F	DN 63 CF-F	DN 100 CF-F
Seal: Housing	Copper		
Seal: Valve seat	FKM		
Feedthrough Bellows	Stainless steel		
Number of screws	6 Pieces	8 Pieces	16 Pieces
Opens against differential pressure of	30 hPa		
Type	UHV gate valve		
Thread	M 6	M 8	
Valve plate	Stainless steel		
Housing	Stainless steel		
Actuator	Manual		
Tightness	1×10^{-11} Pa m3/s		
Bakeout temperature: actuator	60 °C		
Conductance value with molecular flow	128 l/s	524 l/s	1,726 l/s
Pressure max. (absolute)	1,000 hPa		
Thread depth	12 mm	16 mm	
Tightness: Valve seat	1×10^{-10} Pa m3/s		
Tightness: Housing	1×10^{-11} Pa m3/s		
Bakeout temperature: housing	200 °C		
Pressure min.	1×10^{-10} hPa		
Differential pressure in closing direction	1,000 hPa		
Differential pressure in opening direction	1,000 hPa		
Weight approx.	3 kg	5 kg	12 kg

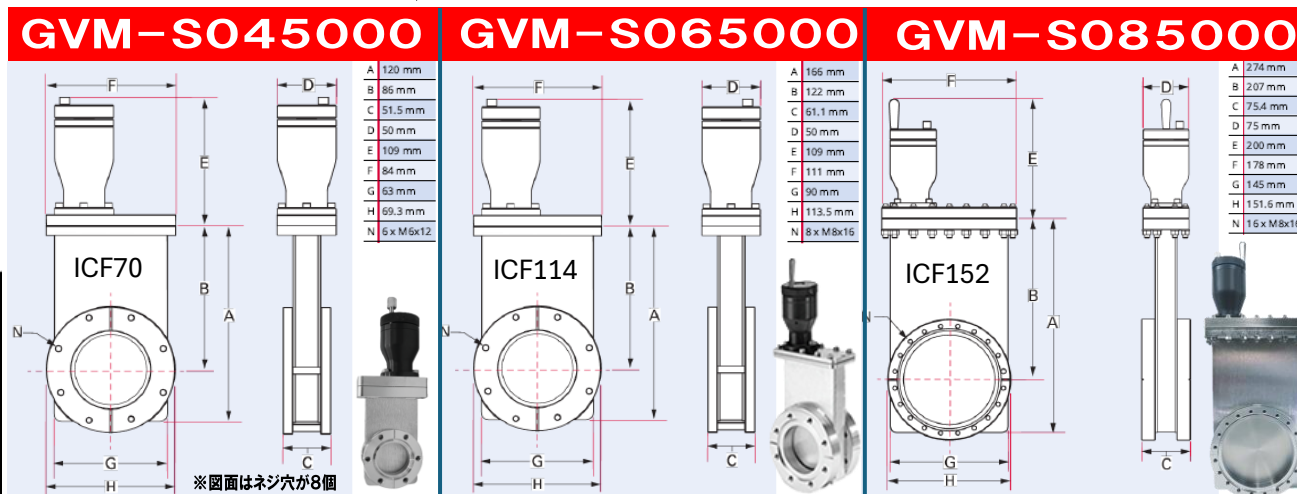

税抜定価

~~¥ 450.000~~



税抜定価

~~¥ 530.000~~



税抜定価

~~¥ 740.000~~



**お気軽に御相談、
お問い合わせください**

表示金額には消費税は含まれません。