

JISフランジシリーズ (JIS FLANGE SERIES)


単位: mm

JIS VF JIS B2290


(SUS304 or SUS316L)

型番	タイプ	外径寸法	フランジの寸法						ボルト穴		
			A	ϕD	T	S	ϕa	w	ϕC	N	h
VF 10- 10A	b	17.3	17.5	70	8	4	15	1.5	50	4	10
VF 10- 00	a	17.3	-	70	8	-	-	-	50	4	10
VF 20- 20A	b	27.2	28.0	80	8	4	25	1.5	60	4	10
VF 20- 00	a	27.2	-	80	8	-	-	-	60	4	10
VF 25- 25A	b	34.0	35.0	90	8	4	32	1.5	70	4	10
VF 25- 00	a	34.0	-	90	8	-	-	-	70	4	10
VF 40- 40A	b	48.6	49.5	105	10	5	46	1.5	85	4	10
VF 40- 00	a	48.6	-	105	10	-	-	-	85	4	10
VF 50- 50A	b	60.5	61.0	120	10	5	57	2.0	100	4	10
VF 50- 00	a	60.5	-	120	10	-	-	-	100	4	10
VF 65- 65A	b	76.3	77.0	145	10	5	73	2.0	120	4	12
VF 65- 00	a	76.3	-	145	10	-	-	-	120	4	12
VF 80- 80A	b	89.1	90.0	160	12	6	86	2.0	135	4	12
VF 80- 00	a	89.1	-	160	12	-	-	-	135	4	12
VF100-100A	b	114.3	115.0	185	12	6	111	2.0	160	8	12
VF100- 00	a	114.3	-	185	12	-	-	-	160	8	12
VF125-125A	b	139.8	141.0	210	12	6	136	2.0	185	8	12
VF125- 00	a	139.8	-	210	12	-	-	-	185	8	12
VF150-150A	b	165.2	166.0	235	12	6	161	2.0	210	8	12
VF150- 00	a	165.2	-	235	12	-	-	-	210	8	12
VF200-200A	b	216.3	218.0	300	16	8	212	3.0	270	8	15
VF200- 00	a	216.3	-	300	16	-	-	-	270	8	15
VF250-250A	b	267.4	269.0	350	16	8	263	3.0	320	12	15
VF250- 00	a	267.4	-	350	16	-	-	-	320	12	15
VF300-300A	b	318.5	320.0	400	16	8	314	3.0	370	12	15
VF300- 00	a	318.5	-	400	16	-	-	-	370	12	15

TYPE:a

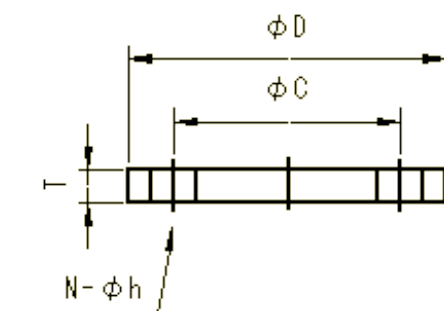

TYPE:b

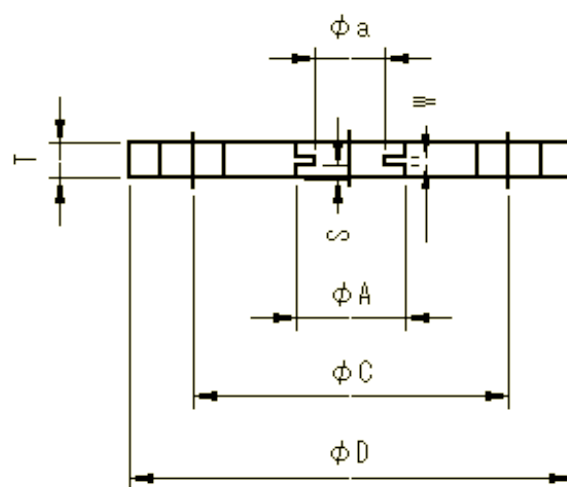


JIS VG JIS B2290

(SUS304 or SUS316L)

型番	フランジの寸法								ボルト穴			Oリング		
	タイプ	外径寸法	A	ϕD	T	S	ϕa	w	ϕC	N	h	G1	G2	H
VG 10- 10A	d	17.3	17.5	70	8	4	15	1.5	50	4	10	24	34	3.0
VG 10- 00	c	17.3	-	70	8	-	-	-	50	4	10	24	34	3.0
VG 20- 20A	d	27.2	28.0	80	8	4	25	1.5	60	4	10	34	44	3.0
VG 20- 00	c	27.2	-	80	8	-	-	-	60	4	10	34	44	3.0
VG 25- 25A	d	34.0	35.0	90	8	4	32	1.5	70	4	10	40	50	3.0
VG 25- 00	c	34.0	-	90	8	-	-	-	70	4	10	40	50	3.0
VG 40- 40A	d	48.6	48.5	105	10	5	46	1.5	85	4	10	55	65	3.0
VG 40- 00	c	48.6	-	105	10	-	-	-	85	4	10	55	65	3.0
VG 50- 50A	d	60.5	61.0	120	10	5	57	2.0	100	4	10	70	80	3.0
VG 50- 00	c	60.5	-	120	10	-	-	-	100	4	10	70	80	3.0
VG 65- 65A	d	76.3	77.0	145	10	5	73	2.0	120	4	12	85	95	3.0
VG 65- 00	c	76.3	-	145	10	-	-	-	120	4	12	85	95	3.0
VG 80- 80A	d	89.1	90.0	160	12	6	86	2.0	135	4	12	100	110	3.0
VG 80- 00	c	89.1	-	160	12	-	-	-	135	4	12	100	110	3.0
VG100-100A	d	114.3	115.0	185	12	6	111	2.0	160	8	12	120	130	3.0
VG100- 00	c	114.3	-	185	12	-	-	-	160	8	12	120	130	3.0
VG125-125A	d	139.8	141.0	210	12	6	136	2.0	185	8	12	150	160	3.0
VG125- 00	c	139.8	-	210	12	-	-	-	185	8	12	150	160	3.0
VG150-150A	d	165.2	166.0	235	12	6	161	2.0	210	8	12	175	185	3.0
VG150- 00	c	165.2	-	235	12	-	-	-	210	8	12	175	185	3.0
VG200-200A	d	216.3	218.0	300	16	8	212	3.0	270	8	15	225	241	3.0
VG200- 00	c	216.3	-	300	16	-	-	-	270	8	15	225	241	4.5
VG250-250A	d	267.4	269.0	350	16	8	263	3.0	320	12	15	275	291	4.5
VG250- 00	c	267.4	-	350	16	-	-	-	320	12	15	275	291	4.5
VG300-300A	d	318.5	320.0	400	16	8	314	3.0	370	12	15	325	341	4.5
VG300- 00	c	318.5	-	400	16	-	-	-	370	12	15	325	341	4.5

TYPE:c

TYPE:d

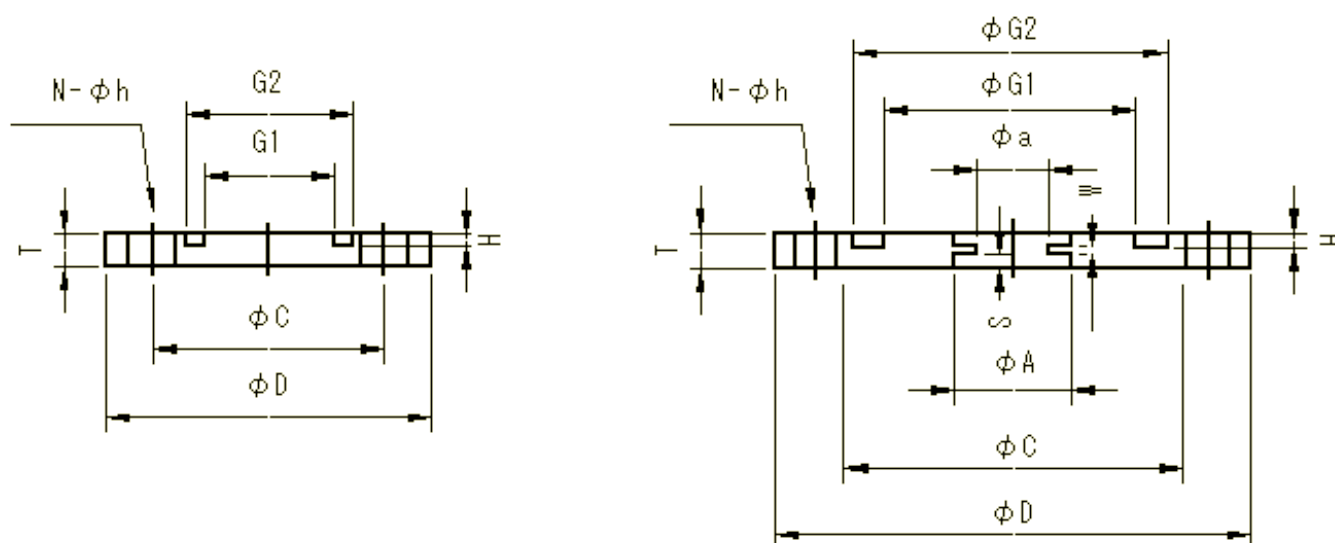


ISOフランジシリーズ (ISO FLANGE SERIES)

単位:mm

■ ISO-MFブランクフランジ (ISO-MF BLANK FLANGE)

(SUS304 or SUS316L)


型番	φA	φB	T
ISO-MF- 63-00	95	70.2	12
ISO-MF- 80-00	110	83.2	12
ISO-MF-100-00	130	102.2	12
ISO-MF-160-00	180	153.2	12
ISO-MF-200-00	240	213.2	12

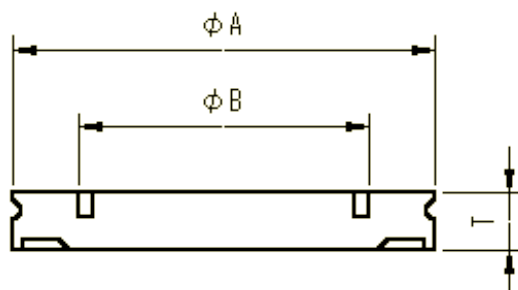

■ ISO-MFフランジ (ISO-MF FLANGE)

(SUS304 or SUS316L)


型番	φA	φB	φC	a	T
ISO-MF- 63- 50	95	70.2	61	5	12
ISO-MF- 63- 65	95	70.2	77	5	12
ISO-MF- 80- 65	110	83.2	77	5	12
ISO-MF- 80- 80	110	83.2	90	5	12
ISO-MF-100- 90	130	102.2	102	5	12
ISO-MF-100-100	130	102.2	115	5	12
ISO-MF-160-153	180	153.2	141	5	12
ISO-MF-200-203	240	153.2	204	5	12

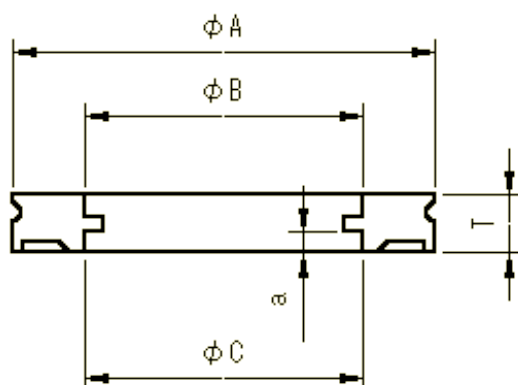

■ ISO-BTフランジ (ISO-BT BLANK FLANGE)


(SUS304 or SUS316L)

型番	φA	φB	φC	φD	n	φH	a	T
ISO-BT- 63- 50	130	70.2	61	110	4	9	5	12
ISO-BT- 80- 80	145	83.2	90	125	8	9	5	12
ISO-BT-100-100	165	102.2	115	145	8	9	5	12
ISO-BT-160-153	225	153.2	141	200	8	11	9	16
ISO-BT-200-203	285	213.2	204	260	12	11	9	16

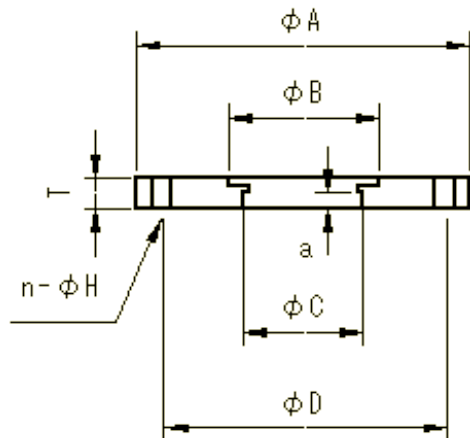

ISO-BT ブランクフランジ (ISO-BT BLANK FLANGE) (SUS304 or SUS316L)

型番	ϕA	ϕB	ϕD	n	ϕH	T
ISO-BT- 63-00	130	70.2	110	4	9	12
ISO-BT- 80-00	145	83.2	125	8	9	12
ISO-BT-100-00	165	102.2	145	8	9	12
ISO-BT-160-00	225	153.2	200	8	11	16
ISO-BT-200-00	265	213.2	160	12	11	16

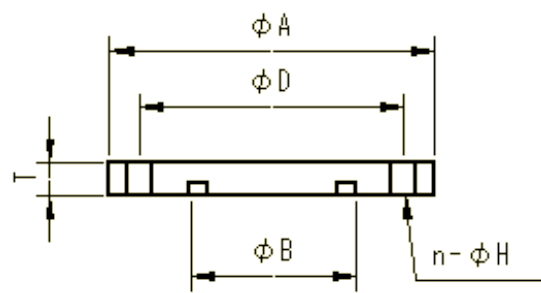

Copyright (C) 2002 ADVANTEC CO.,LTD. All Rights Reserved.

閉じる